



TOPRING

CONTRACTOR
SELECTION

TOPRING

CONTRACTOR SELECTION

A selection of **TOPRING** compressed air products used by contractors, carpenters and construction workers

TOPRING can help you with your compressed air system project

Whether you need technical support or specific project guidances, our technical team is always available to help you with your compressed air fitting system project. Our technical advisors can visit your company to help you optimize your system by offering solutions tailored to your needs.

Contact us to make an appointment. Call us at **1 800 263-8677** or write to solutions@topring.ca



EASYflex PREMIUM

TECHNOPOLYMER AIR HOSE

- Engineered to be tough and ultra-flexible at extremely low temperatures
- 35 % lighter than rubber for easy handling
- Easily recoils after use, no memory



72.164	1/4 x 25 ft x 1/4 (M) NPT
72.168	1/4 x 50 ft x 1/4 (M) NPT
72.170	1/4 x 100 ft x 1/4 (M) NPT
72.364	3/8 x 25 ft x 1/4 (M) NPT
72.368	3/8 x 50 ft x 1/4 (M) NPT
72.370	3/8 x 100 ft x 1/4 (M) NPT
72.469	1/2 x 50 ft x 3/8 (M) NPT
72.471	1/2 x 100 ft x 3/8 (M) NPT

HOSE ASSEMBLIES WITH 1/4 INDUSTRIAL COUPLER AND PLUG

72.165	1/4 x 25 ft x 1/4 (M) NPT
72.169	1/4 x 50 ft x 1/4 (M) NPT



ECOFLEX TECHNOPOLYMER AIR HOSE

- Excellent flexibility
- Very good performance in cold weather

- Excellent abrasion resistance
- Bend restrictors extend the life of the air hose



70.136	1/4 x 25 ft x 1/4 (M) NPT
70.132	1/4 x 35 ft x 1/4 (M) NPT
70.138	1/4 x 50 ft x 1/4 (M) NPT
70.140	1/4 x 100 ft x 1/4 (M) NPT
70.336	3/8 x 25 ft x 1/4 (M) NPT
70.332	3/8 x 35 ft x 1/4 (M) NPT
70.338	3/8 x 50 ft x 1/4 (M) NPT
70.340	3/8 x 100 ft x 1/4 (M) NPT

HOSE ASSEMBLIES WITH 1/4 INDUSTRIAL COUPLER AND PLUG

70.137	1/4 x 25 ft x 1/4 (M) NPT
70.139	1/4 x 50 ft x 1/4 (M) NPT
70.141	1/4 x 100 ft x 1/4 (M) NPT



NEW



HOSE ASSEMBLIES WITH 1/4 INDUSTRIAL COUPLER AND PLUG

70.189.01	1/4 x 50 ft x 1/4 (M) NPT
70.191.01	1/4 x 100 ft x 1/4 (M) NPT
70.389.01	3/8 x 50 ft x 1/4 (M) NPT
70.391.01	3/8 x 100 ft x 1/4 (M) NPT

QUIKSILVER 2 QUICK COUPLER

- Automatic push-to-connect
- High performance
- Compact and ergonomic
- Corrosion resistant



AIR HOSES

FLEXAIR POLYURETHANE AIR HOSE



200
PSI

TEMP °C
- 40
+ 60



- Excellent for air tools such as nailers and staplers
- Lightweight and flexible
- Excellent resistance to oils, grease, solvents and abrasion
- Superior resistance to cuts and punctures

74.167 1/4 x 50 ft x 1/4 (M) NPT

74.169 1/4 x 100 ft x 1/4 (M) NPT

HOSE ASSEMBLIES WITH 1/4 INDUSTRIAL COUPLER AND PLUG

74.173 1/4 x 25 ft x 1/4 (M) NPT

74.174 1/4 x 50 ft x 1/4 (M) NPT

74.175 1/4 x 100 ft x 1/4 (M) NPT



TOPMAX POLYURETHANE AIR HOSE



250
PSI

TEMP °C
- 40
+ 74



360°

Swivel fittings
at both ends

- Light and durable
- Excellent resistance to lubricating oils, grease, chemical and abrasion
- Non-marking cover

78.114 1/4 x 25 ft x 1/4 (M) NPT

78.118 1/4 x 50 ft x 1/4 (M) NPT

78.150 1/4 x 100 ft x 1/4 (M) NPT

AIRFLEX Premium RUBBER AIR HOSE

250
PSI

TEMP °C
- 40
+ 100



- Flexible and durable rubber air hose
- Excellent for air tools
- Excellent resistance to abrasion
- Cover with medium oil resistance (RMA-Class C)

71.315 3/8 x 25 ft x 1/4 (M) NPT

71.319 3/8 x 50 ft x 1/4 (M) NPT

71.415 1/2 x 25 ft x 3/8 (M) NPT

71.418 1/2 x 50 ft x 1/2 (M) NPT

71.453 1/2 x 100 ft x 3/8 (M) NPT

INTERIOR DIAMETER REQUIRED BY PNEUMATIC TOOL TYPES


To choose the proper hose internal diameter, it is important to know the consumption of the tool used (flow SCFM) and the length of air hose required (in feet).

Use of a smaller than recommended hose size will result in a serious reduction of tool performance.

3/8 I.D. air hose offers 3 times
more flow than a 1/4. I.D.



1/2 I.D. air hose offers 2 times
more flow than a 3/8. I.D.

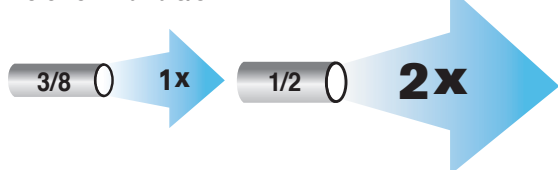

TOOL TYPES	FLOW SCFM	FLEXIBLE HOSE HOSE LENGTH (ft)					
		25'	35'	50'	75'	100'	150'
IMPACT TOOLS							
18 gauge nailer/stapler	2.5	1/4	1/4	1/4	1/4	1/4	1/4
22-18 gauge stapler	3.5	1/4	1/4	1/4	1/4	1/4	1/4
Finishing nailer	3.5	1/4	1/4	1/4	1/4	1/4	1/4
Roofing nailer	6.0	3/8	3/8	3/8	3/8	3/8	1/2
Framing nailer	11.0	3/8	3/8	3/8	3/8	3/8	1/2
POLISHING TOOLS							
Orbital polisher	16.6	3/8	3/8	1/2	1/2	1/2	1/2
Oscillating sander	23.0	1/2	1/2	1/2	1/2	3/4	3/4
SANDERS							
Sander	9.6	5/16	5/16	3/8	3/8	3/8	1/2
4-1/2" angle grinder	18.4	3/8	1/2	1/2	1/2	1/2	3/4
10mm belt sander	18.9	3/8	1/2	1/2	1/2	1/2	3/4
7" angle sander	29.6	1/2	1/2	1/2	3/4	3/4	3/4
DRILLS							
3/8" air drill	17.3	3/8	1/2	1/2	1/2	1/2	1/2
3/8" reversible air drill	23.8	1/2	1/2	1/2	1/2	3/4	3/4
1/2" reversible air drill	26.4	1/2	1/2	1/2	3/4	3/4	3/4
OTHER TOOLS							
Riveter	4.0	1/4	1/4	1/4	1/4	1/4	1/4
Caulking gun	0.1	1/4	1/4	1/4	1/4	1/4	1/4
HVLP paint gun	9.5	5/16	5/16	3/8	3/8	3/8	1/2
Screw driver	9.6	5/16	5/16	3/8	3/8	3/8	1/2
Gravity fed sand blaster	12.0	3/8	3/8	3/8	1/2	1/2	1/2

SELF-STORING HOSES



FLEXCOIL ETHER BASE POLYURETHANE HOSE

140
PSI

TEMP °C
- 40
+ 70

360°
Swivel fitting
at both ends



- Ether-based polyurethane properties offer longer lifespan
- High abrasion and moisture absorption resistance
- 25 % lighter than rubber hoses
- Superior elasticity and flexibility compared to nylon hoses
- Straight 20-inch and 4-inch tails for tangle-free tool operations


17.610	1/4 x 15 ft x 1/4 (M) NPT
17.620	1/4 x 25 ft x 1/4 (M) NPT
17.724	3/8 x 25 ft x 1/4 (M) NPT
17.754	3/8 x 50 ft x 1/4 (M) NPT

MAXAIR ESTER BASE POLYURETHANE HOSE

132
PSI

TEMP °C
- 20
+ 70

360°
Swivel fitting at
the air supply
extremity only

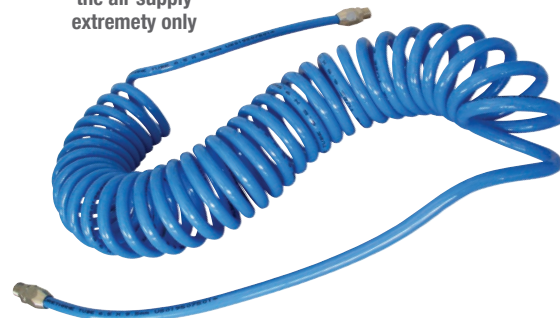


- Ester-based polyurethane ideal for applications in presence of oil
- Excellent recoil memory
- Very high resistance to folding
- Lightweight and flexible

14.620	1/4 x 25 ft x 1/4 (M) NPT
14.650	1/4 x 50 ft x 1/4 (M) NPT
14.724	3/8 x 25 ft x 1/4 (M) NPT
14.754	3/8 x 50 ft x 1/4 (M) NPT

REUSABLE SWIVEL FITTING FOR HOSE REPAIR

Replacement fittings

1. After cutting the hose end straight insert the sleeve nut.
2. Press the barbed end of the fitting into the end of the hose until it seats against the thread base.
3. Slide the nut onto the fitting and tighten. Complete the installation by tightening the nut with the appropriate wrench until it reaches the fitting body.

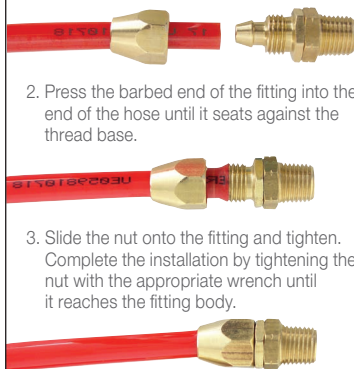


Quantity
per package

17.044C	1/4 I.D. • 1/4 (M) NPT	2/card
17.044	1/4 I.D. • 1/4 (M) NPT	10
17.064C	3/8 I.D. • 1/4 (M) NPT	2/card
17.064	3/8 I.D. • 1/4 (M) NPT	10

REUSABLE FITTING FOR HOSE REPAIR

Repair of hose

1. After cutting straight both sides of the hose, insert the sleeve nut on each side
2. Press the barbed ends of the fitting into the end of each hose until it seats against the thread base.
3. Slide each nut onto the fitting and tighten. Complete the installation by tightening the nuts with the appropriate wrench until it reaches the fitting body.

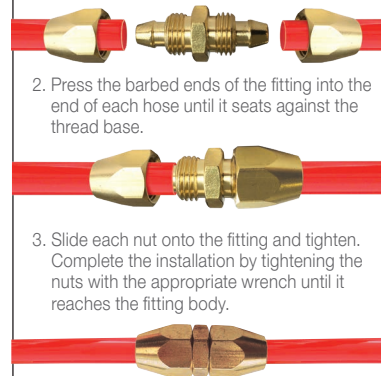



Quantity
per package

41.835	1/4 I.D. • 3/8 O.D.	5
--------	---------------------	---

HOSE REPAIR ACCESSORIES

HOSE REPAIR KIT

			Quantity per package
41.511C	For 1/4 I.D. hose	1	
41.531C	For 3/8 I.D. hose	1	

			Quantity per package
41.514C	For 1/4 I.D. hose	1	
41.534C	For 3/8 I.D. hose	1	



TWO-EAR HOSE CLAMPS FOR HOSE

- One-piece design offers strong clamping action without damage to air hose
- Quick assembly using a crimping pincer

	Clamping dimensions (mm)	Clamping dimensions (in)	Quantity per package
48.310	9 - 11	11/32 - 7/16	10
48.310.100	9 - 11	11/32 - 7/16	100
48.314	11 - 13	7/16 - 1/2	10
48.314.100	11 - 13	7/16 - 1/2	100
48.316	13 - 15	1/2 - 19/32	10
48.316.100	13 - 15	1/2 - 19/32	100
48.320	15 - 18	19/32 - 23/32	10
48.320.100	15 - 18	19/32 - 23/32	100



Select a hose clamp diameter larger than the outside diameter (O.D.) of the air hose on which the hose clamp will be used. The type of fitting installed to the hose and the thickness of the hose can also influence the choice of clamp.

TWO-EAR HOSE CLAMP KIT

- Ideal for regular service or emergency use
- Most commonly used sizes of two-ear hose clamps with crimping pincer in a plastic case

48.900 Hose clamp kit with box



KIT INCLUDES

- 10 x 48.308 (7-9 mm)
- 10 x 48.310 (9-11 mm)
- 10 x 48.314 (11-13 mm)
- 10 x 48.316 (13-15 mm)
- 10 x 48.320 (15-18 mm)
- 10 x 48.322 (17-20 mm)
- 10 x 48.326 (20-23 mm)
- 10 x 48.330 (23-27 mm)
- 1 x 48.600 crimping pincer

HOSE REELS

PolyReel PROFESSIONAL PORTABLE HOSE REEL

Ideal for outdoor and indoor
construction applications

- Rugged steel construction for durability
- Manual rewind
- Transportation and rewinding handles covered with soft and comfortable foam
- Guard bend restrictor at both ends of air hose



WITH ECOFLEX TECHNOPOLYMER HOSE



Hose characteristics

- Tough and ultra-flexible at extreme temperatures -40 to 65 °C
- 1/4 INDUSTRIAL quick coupler and plug
- Abrasion and oil resistant
- Non-marking outer cover and kink resistant under pressure

79.050 1/4 I.D. x 100 ft x 1/4 (M) NPT

WITH EASYflex TECHNOPOLYMER HOSE



Hose characteristics

- Tough and ultra-flexible even at -54 °C
- Abrasion and oil resistant
- Kink resistant under pressure
- Wraps easily after use

79.060 1/4 I.D. x 100 ft x 1/4 (M) NPT

WITH FLEXAIR POLYURETHANE HOSE



Hose characteristics

- Tough, lightweight and ultra-flexible at extreme temperatures -40 °C
- Excellent resistance to weather, abrasion and lubricating oils
- Reusable full flow swivel fittings at both ends


79.040 1/4 I.D. x 100 ft x 1/4 (M) NPT

HOSE REELS

TopReel HD

HEAVY-DUTY HOSE REEL WITH THERMOFLEX TECHNOLOGY HOSE

- Automatic rewind
- Heavy-duty steel construction for durable use
- Wide profile base with grooved reinforcement
- Adjustable guide arm for wall, ceiling and floor installation

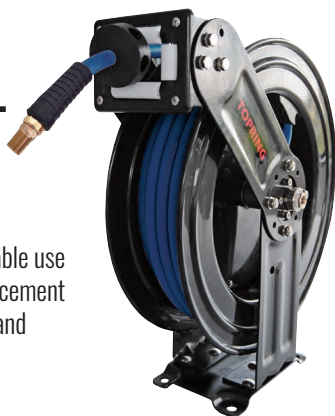

Hose characteristics

- High quality flexible PVC compound keeps its flexibility even in cold weather (an alternative to rubber)
- Excellent abrasion resistance
- Resistant to climatic conditions, UV rays and chemicals

79.514	3/8 x 50 ft x 1/4 (M) NPT	LARGE
79.519	1/2 x 50 ft x 3/8 (M) NPT	X-LARGE

SWIVEL MOUNTING ACCESSORY

Fixed position or rotation angles of 55 to 120 °



79.481	LARGE
--------	-------

MAXREEL PROFESSIONAL HOSE REEL

- Automatic rewind
- Robust steel construction

- Corrosion-resistant durable epoxy powder coated finish
- Adjustable guide arm for wall, ceiling and floor installation

WITH ECOFLEX TECHNOLOGY HOSE



Hose characteristics

- Excellent flexibility and very good performance in cold weather (-40 °C)
- Excellent abrasion resistance
- Bend restrictor to extend the life of the air hose

79.333	3/8 x 33 ft x 1/4 (M) NPT	STANDARD
79.335	3/8 x 50 ft x 1/4 (M) NPT	LARGE

WITH FLEXHYBRID TECHNOLOGY HOSE



Hose characteristics

- Lightweight and excellent flexibility
- Good resistance to oils
- Good quality at a good price

79.334	3/8 x 50 ft x 1/4 (M) NPT	LARGE
79.336	1/2 x 50 ft x 3/8 (M) NPT	X-LARGE

SWIVEL MOUNTING ACCESSORY

Positioning angles up to 120 °



79.387	STANDARD
79.388	LARGE / X-LARGE

EzReel PROFESSIONAL HOSE REEL WITH ECOFLEX TECHNOLOGY HOSE

- Construction sites, mobile units and garages
- Manual rewind / Easy to carry
- Heavy-duty steel construction

Hose characteristics

- Excellent flexibility
- Very good performance in cold weather (-40 °C)
- Excellent abrasion resistance
- Bend restrictor at both ends



79.802	1/4 x 100 ft x 1/4 (M) NPT	STANDARD
79.804	3/8 x 50 ft x 1/4 (M) NPT	STANDARD

RolAir PROFESSIONAL HOSE REEL WITH PVC AND TECHNOLOGY HOSE

- Automatic rewind
- Compact design
- Durable construction - made from high-impact resistant polypropylene
- Integrated wall/overhead swivel bracket

Hose characteristics

TECHNOPOLYMER

- Lightweight / Ultra-flexible
- Excellent resistance to lubricating oils

PVC

- Lightweight / Ultra-flexible
- Excellent weather resistance



79.365



79.380

79.365	Technopolymer hose	1/4 x 27 ft x 1/4 (M) NPT	COMPACT
79.380	PVC hose	3/8 x 50 ft x 1/4 (M) NPT	LARGE

QUICK COUPLERS

TOPQUIK S1 AUTOMATIC SAFETY



SAFETY



ERGONOMICS

- Safe disconnection preventing the possibility of dangerous hose whips
- Downstream pressure automatically vented for easy disconnection at zero pressure
- Non-marring coupler body prevents scratching delicate surfaces
- Swivel body allows quick installation and optimal positioning
- Optimized airflow

SAFE DISCONNECTION IN 1 SINGLE PUSH



With a single push on the button, the plug is disconnected but held within the coupler



The plug can be removed safely



OPTIMAL
SEALING



I/M
1/4

174
PSI

34
SCFM

INDUSTRIAL

Quantity
per package

20.415C	1/4 (F) NPT	1/card
20.415	1/4 (F) NPT	1



E
7.8

174
PSI

73
SCFM

ULTRAFLO

Quantity
per package

31.715C	1/4 (F) NPT	1/card
31.715	1/4 (F) NPT	1

TOPQUIK AUTOMATIC SAFETY



SAFETY

- Safe disconnection preventing the possibility of dangerous hose whips
- Downstream pressure automatically vented for easy disconnection at zero pressure
- Non-marring coupler body prevents scratching delicate surfaces
- Shock resistant coupler provides exceptionally long service life

SAFETY SOLUTION WITH A 2-STEP DISCONNECTION



Slide the sleeve back to release downstream pressure
The plug is released but held within the coupler



Slide the sleeve forward
The plug is released completely



I/M
1/4

225
PSI

36
SCFM

INDUSTRIAL

Quantity
per package

20.449C	1/4 (F) NPT	1/card
20.449	1/4 (F) NPT	1
20.449.50	1/4 (F) NPT	50



E
7.8

174
PSI

59
SCFM

ULTRAFLO

Quantity
per package

31.749C	1/4 (F) NPT	1/card
31.749	1/4 (F) NPT	1
31.749.50	1/4 (F) NPT	50

QUICK COUPLERS

QUIKSILVER 2 AUTOMATIC COMPACT

NEW

- Compact version of the QUIKSILVER: 20% lighter than the QUIKSILVER and offers the same airflow (SCFM) and working pressure (PSI)
- High performance and corrosion-resistant coupler
- Automatic push-to-connect operation with efficient and secure connection
- Drag guard protects against accidental disconnection



I/M
1/4

362
PSI

44
SCFM

INDUSTRIAL		Quantity per package
20.416	1/4 (F) NPT	1
20.416.10	1/4 (F) NPT	10
20.416.100	1/4 (F) NPT	100
20.616	1/4 (M) NPT	1
20.616.10	1/4 (M) NPT	10
20.616.100	1/4 (M) NPT	100
20.436	3/8 (F) NPT	1
20.436.10	3/8 (F) NPT	10
20.636	3/8 (M) NPT	1
20.636.10	3/8 (M) NPT	10



E
7.8

362
PSI

80
SCFM

ULTRAFLO		Quantity per package
31.746	1/4 (F) NPT	1
31.746.10	1/4 (F) NPT	10
31.746.100	1/4 (F) NPT	100
31.846	1/4 (M) NPT	1
31.846.10	1/4 (M) NPT	10
31.766	3/8 (F) NPT	1
31.766.10	3/8 (F) NPT	10
31.866	3/8 (M) NPT	1
31.866.10	3/8 (M) NPT	10

QUIKSILVER AUTOMATIC

- High performance and corrosion-resistant
- Easy to connect, even under pressure
- Sleeve guard prevents accidental disconnection



I/M
1/4

362
PSI

44
SCFM

INDUSTRIAL		Quantity per package
20.446C	1/4 (F) NPT	1/card
20.446	1/4 (F) NPT	1
20.446.100	1/4 (F) NPT	100
20.466	3/8 (F) NPT	1



I/M
3/8

435
PSI

72
SCFM

INDUSTRIAL		Quantity per package
21.446C	1/4 (F) NPT	1/card
21.446	1/4 (F) NPT	1
21.466	3/8 (F) NPT	1



E
7.8

362
PSI

80
SCFM

ULTRAFLO		Quantity per package
31.744C	1/4 (F) NPT	1/card
31.744	1/4 (F) NPT	1
31.744.100	1/4 (F) NPT	100
31.764C	3/8 (F) NPT	1/card
31.764	3/8 (F) NPT	1
31.764.100	3/8 (F) NPT	100

QUICK COUPLERS

MAXQUIK

MANUAL

- Compact design
- Sleeve guard prevents accidental disconnection
- Four-ball locking mechanism for a tight long-lasting connection



I/M 1/4	250 PSI	24 SCFM	Quantity per package
INDUSTRIAL			
20.842C	1/4 (F) NPT	1/card	
20.842	1/4 (F) NPT	10	
20.842.100	1/4 (F) NPT	100	
20.862C	3/8 (F) NPT	10	
20.862	3/8 (F) NPT	1	

AUTOMAX

AUTOMATIC

Proven and positive connection using pin lock mechanism



<div>I/M</div> <div>1/4</div>		<div>250</div> <div>PSI</div>	<div>37</div> <div>SCFM</div>	Quantity per package
INDUSTRIAL				
20.444C	1/4 (F) NPT	1/card		
20.444	1/4 (F) NPT	10		
20.444.100	1/4 (F) NPT	100		
20.464C	3/8 (F) NPT	1/card		
20.464	3/8 (F) NPT	10		

UNIMAX

UNIVERSAL AUTOMATIC

Accept
5 types of plugs
1/4 INDUSTRIAL
ARO 210
1/4 TRUFLATE
LINCOLN
ULTRAFLO



<div>U</div> <div>1/4</div>	<div>200</div> <div>PSI</div>	<div>37</div> <div>SCFM</div>	
UNIVERSAL		Quantity per package	
20.441C	1/4 (F) NPT	1/card	
20.441	1/4 (F) NPT	10	
20.441.100	1/4 (F) NPT	100	

UNIQUIK

UNIVERSAL AUTOMATIC

Accept
3 types of plugs:
1/4 INDUSTRIAL
ARO 210
1/4 TRUFLATE




U 1/4	150 PSI	35 SCFM	
UNIVERSAL		Quantity per package	
20.440C	1/4 (F) NPT	1/card	
20.440	1/4 (F) NPT	10	
20.440.100	1/4 (F) NPT	100	
20.460	3/8 (F) NPT	10	
20.460.100	3/8 (F) NPT	100	

FREE ANGLE AND SWIVEL FITTINGS

AIRPRO 90° FREE ANGLE FITTING

- Designed to provide 360° circular rotation and up to 90° of angle for air tool and air hose supply lines
- Improve tool maneuverability
- Full flow design



		Quantity per package
62.332C	1/4 (F) NPT x 1/4 (M) NPT	1/card
62.332	1/4 (F) NPT x 1/4 (M) NPT	1
62.334C	3/8 (F) NPT x 3/8 (M) NPT	1/card
62.334	3/8 (F) NPT x 3/8 (M) NPT	1
62.336C	1/2 (F) NPT x 1/2 (M) NPT	1/card
62.336	1/2 (F) NPT x 1/2 (M) NPT	1

MAXPRO 30° FREE ANGLE FITTING


Free angle fittings are designed to provide 360° of rotation and up to 30° of angle for air tool supply lines



		Quantity per package
62.360C	1/4 INDUSTRIAL x 1/4 (M) NPT	1/card
62.360	1/4 INDUSTRIAL x 1/4 (M) NPT	1

MAXPRO SWIVEL FITTING

Swivel 360° at two pivot points keeping air hose in proper position while providing great tool handling



		Quantity per package
62.705C	1/4 (F-M) NPT	1/card
62.705	1/4 (F-M) NPT	1
62.705.10	1/4 (F-M) NPT	10

Caution: This fitting should not be used with impact tools

CONNECTION KITS

AIR TOOL CONNECTION MANUAL

Ideal for connecting a tool to an air hose or a compressor



I/M	Quantity per package
1/4 INDUSTRIAL	
20.711C	1/card

2 OUTLET MANIFOLD WITH COUPLERS AND PLUG MANUAL


Connections of 2 tools to an air hose or a compressor



I/M	Quantity per package
1/4 INDUSTRIAL	
20.702C	1/card

3 OUTLET MANIFOLD WITH COUPLERS AND PLUG MANUAL

Connections of 2 tools to an air hose or a compressor



I/M	Quantity per package
1/4 INDUSTRIAL	
20.703C	1/card

AIR MANIFOLD 2 IN 1 MANUAL

- A single air inlet supplies 2 air tools
- Compact design



I/M	Air Inlet	Quantity per package
1/4 INDUSTRIAL		
62.850C	1/4 (F) NPT	1/card
62.850	1/4 (F) NPT	1
62.860C	1/4 (M) NPT	1/card
62.860	1/4 (M) NPT	1

PLUGS

- Zinc plated for an increased durability
- Corrosion-resistant
- Made according to the industry standards to ensure compatibility



I/M 1/4		Quantity per package
INDUSTRIAL		
20.142C	1/4 (F) NPT	2/card
20.142	1/4 (F) NPT	10
20.142.250	1/4 (F) NPT	250
20.142.500	1/4 (F) NPT	500
20.242C	1/4 (M) NPT	2/card
20.242	1/4 (M) NPT	10
20.242.250	1/4 (M) NPT	250
20.242.500	1/4 (M) NPT	500



I/M 3/8		Quantity per package
INDUSTRIAL		
21.142C	1/4 (F) NPT	1/card
21.142	1/4 (F) NPT	10
21.142.100	1/4 (F) NPT	100
21.242C	1/4 (M) NPT	1/card
21.242	1/4 (M) NPT	10
21.242.100	1/4 (M) NPT	100



E 7.8		Quantity per package
ULTRAFLO		
31.542C	1/4 (F) NPT	2/card
31.542	1/4 (F) NPT	10
31.542.250	1/4 (F) NPT	250
31.642C	1/4 (M) NPT	2/card
31.642	1/4 (M) NPT	10
31.642.250	1/4 (M) NPT	250

RUBAN PTFE SEALING TAPE

- 12 mm x 12 meters
- Industrial quality
- Prevents air leaks on all threaded connections

	Quantity per package
41.005C	2/card
41.005	10
41.005.50	50



For an airtight connection, it is recommended to use PTFE tape on male threads

BRASS FITTINGS


- One-piece construction
- Good resistance to vibration
- Corrosion resistant



MALE HEXAGONAL NIPPLE		Quantity per package
41.105C	1/4 (M) NPT	2/card
41.105	1/4 (M) NPT	10
41.105.100	1/4 (M) NPT	100



FEMALE HEXAGONAL COUPLING		Quantity per package
41.195C	1/4 (F) NPT	2/card
41.195	1/4 (F) NPT	10
41.195.100	1/4 (F) NPT	100



REDUCING BUSHING		Quantity per package
41.175C	3/8 (M) NPT x 1/4 (F) NPT	2/card
41.175	3/8 (M) NPT x 1/4 (F) NPT	10
41.175.100	3/8 (M) NPT x 1/4 (F) NPT	100



FEMALE TEE		Quantity per package
41.270C	1/4 (F) NPT	1/card
41.270	1/4 (F) NPT	10
41.270.100	1/4 (F) NPT	100



HOSE BARB SPLICER		Quantity per package
41.510C	1/4 I.D.	2/card
41.510	1/4 I.D.	10
41.510.100	1/4 I.D.	100



HOSE BARB TO MALE PIPE		Quantity per package
41.550C	1/4 (M) NPT x 1/4 I.D.	2/card
41.550	1/4 (M) NPT x 1/4 I.D.	10
41.550.100	1/4 (M) NPT x 1/4 I.D.	100
41.570C	1/4 (M) NPT x 3/8 I.D.	2/card
41.570	1/4 (M) NPT x 3/8 I.D.	10
41.570.100	1/4 (M) NPT x 3/8 I.D.	100

BLOW GUNS

AIRPRO MAXIMUM SAFETY

**232
PSI**

- The safest blow gun available on the market
- Powerful airflow and low noise level
- Built-in tamper-proof valve automatically shuts off the airflow in case of tube obstruction



A UNIQUE CONCEPT
AIRPRO's maximum safety blow gun exceed OSHA and other Safety Agencies' standards, because if the tip of the blow gun is blocked, a safety check valve located inside the blow gun mechanism shuts off the airflow immediately.



SAFETY



NOISE
REDUCTION



ERGONOMICS



60.385 | 60.389
8 mm tube x 10 cm | 8 mm tube x 10 cm

	Quantity per package
60.385C	1/card
60.385	1
60.385.25	25
60.389C	1/card
60.389	1
60.389.25	25

AIRPRO HIGH PERFORMANCE NON-RESTRICTED BLOW GUN

**232
PSI**



ERGONOMICS



StarTip
nozzle



60.320 | 60.330
6 mm tube x 10 cm | 6 mm tube x 10 cm



60.357 | 60.377
6 mm tube x 10 cm | 8 mm tube x 10 cm



60.390 | 60.393 | 60.395
8 mm tube x 10 cm | 8 mm tube x 30 cm | 8 mm tube x 50 cm

Long tube for
hard-to-reach
areas

	Quantity per package
60.320C	1/card
60.320	1
60.320.25	25
60.330C	1/card
60.330	1
60.330.25	25

	Quantity per package
60.357	1
60.357.25	25
60.377	1
60.377.25	25

	Quantity per package
60.390C	1/card
60.390	1
60.390.25	25
60.393	1
60.393.10	10
60.395	1
60.395.10	10

BLOW GUNS

MAXJET 14-PIECE ACCESSORY KIT

- 1 compact **MAXJET** blow gun
- 4 interchangeable nozzles
- 1 1/4 INDUSTRIAL quick coupler
- 3 male plugs
- 1 female plug
- 1 male hexagonal nipple
- 1 PTFE tape
- 1 tire gauge
- 1 extended dual foot air chuck

150
PSI



Comes in
a convenient
box



I/M	Quantity per package
1/4 60.065C	1/box

MAXJET 5-PIECE ACCESSORY KIT

- 1 compact blow gun
- 4 interchangeable nozzles

150
PSI



Quantity per package
60.070C 1/card

MAXJET NON-RESTRICTED BLOW GUN

- Powerful airflow provides a narrow and concentrated airflow
- Ergonomic design reduces hand fatigue

150
PSI



Quantity per package
60.322C 1/card
60.322 1
60.322.25 25
60.322.100 100
60.324 1


MAXPRO SAFETY HIGH FLOW BLOW GUN WITH VENTURI NOZZLE

120
PSI



Designed to move a large volume of debris through the venturi nozzle increasing the available air thrust by 40% compared to conventional blow guns.

Should the tip of the nozzle be blocked, the static pressure remains under 30 PSI (meeting OSHA standards).

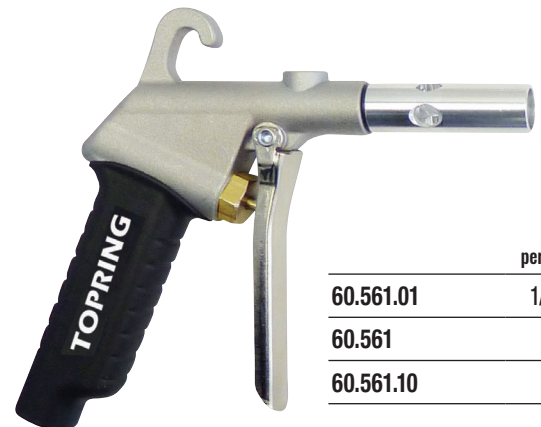

Quantity per package
60.561.01 1/card
60.561 1
60.561.10 10

PENCIL STYLE BLOW GUN

- Narrow and high velocity jet of air
- Compact and light, fit into a shirt pocket like a pen
- Twist to adjust flow

150
PSI



1/4 INDUSTRIAL
type plug



Quantity per package
60.005C 1/card
60.005 5
60.005.50 50

VACUUM UNITS AND AIR GUN


SAFETY PERSONAL CLEANING UNIT WITH AIR AGITATOR BRUSH

*Cleaning yourself with a
blow gun is not only dangerous,
it is ILLEGAL!*

- Perfect solution to eliminate the risk of injury to users
- Designed to meet the standards of OSHA and other health and safety agencies
- Cleans quickly and efficiently

HOW DOES IT WORK?

By simply pressing the lever on the brush attachment, the air-agitator loosens and lifts particles and debris airborne where the vacuum sucks them away safely and effectively.

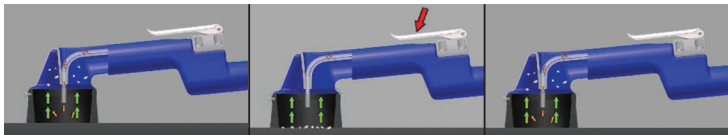

66.202	Standard Filtration Filter with 77% efficient at 0.8 micron
66.203	HEPA Filtration Filter with 99.97% efficient at 0.3 micron

TOPVAC VACUUM BLOW GUN



- Efficient and safe tool for cleaning off clothes
- High power vacuum unit for pick-up of heavier debris
- Rugged aluminium construction for intensive use
- No need for electricity



INCLUDES

- Reusable collector bag
- 30 cm crevice tool
- Fibre bristle for use with crevice tool
- Upholstery/clothes tool
- Multipurpose swivel brush
- Flat brush

67.060 TOPVAC kit

TYPHOON EXTREME PERFORMANCE AIR GUN WITH VENTURI NOZZLE



- Extremely powerful
- Designed specifically for heavy-duty industrial and construction applications
- Quickly move large volumes of debris by delivering 100% of the power provided by the air compressor
- Rugged all metal construction with adjustable auxiliary handle for two-handed operation

If tip is blocked, static pressure will remain at less than 30 PSI to meet OSHA and other Health and Safety Agencies' standards



60.700 120 cm tube

TOOL ACCESSORIES

MAXPRO IN-LINE AIRFLOW REGULATOR

- Regulator and valve in one facilitate air pressure setting and control
- Helps ensure optimal atomization for HVLP paint application, reducing rework
- Helps reduce overspray and material consumption



		Quantity per package
62.105C	1/4 (F-M) NPT	1/card
62.105	1/4 (F-M) NPT	1

PRESSURE REGULATOR PISTON TYPE

- Solid control piston with lip seal for extended lifespan
- Non-rising adjusting knob
- Easily serviced
- Lightweight and compact
- 2 to 125 PSI



		Quantity per package
62.175C	1/4 (F) NPT	1/card
62.175	1/4 (F) NPT	1

DISPOSABLE DRYER / FILTER



**IDEAL
FOR PAINT GUNS**

- Compact size and lightweight
- Installed right at the point of use, it functions in either direction
- Replace filter when desiccant color changes from the original blue to a pink color

		Quantity per package
62.150C	1/4 (F-M) NPT	1/card
62.150	1/4 (F-M) NPT	1
62.150.10	1/4 (F-M) NPT	10

MAXPRO IN-LINE FILTER



**WATER AND OIL
FILTER**

- Lightweight and compact, connects directly to the tool
- Clear reservoir shows accumulated water
- Button relief valve for draining trapped liquid from reservoir

		Quantity per package
62.106C	1/4 (F-M) NPT	1/card
62.106	1/4 (F-M) NPT	1

MAXPRO IN-LINE LUBRICATOR



- Automatically lubricates a tool by feeding a measured amount of oil mist each time the tool is cycled
- Clear plastic reservoir to check oil supply

		Quantity per package
62.108C	Inlet 1/4 (F)NPT	1/card
62.108	Outlet 1/4 (M)NPT	1

TOOL ACCESSORIES

HOSE WHIP

EASYflex® PREMIUM


- Ergonomic connection increases coupler lifespan and protects from tool impacts and shocks
- Highly ergonomic for superior air tool productivity



ERGONOMICS



All sharp bends on hose lines should be avoided. These tend to shorten hose life, increase pressure drops, retard swivel action, increase pump load and raise the temperature of the fluid.



62.560C



62.562C

		Quantity per package
62.523	I.D. 1/4 • 18 in x 1/4 (F) (M) NPT	1
62.541C	I.D. 3/8 • 12 in x 1/4 (F) (M) NPT	1/card
62.541	I.D. 3/8 • 12 in x 1/4 (F) (M) NPT	1
62.543C	I.D. 3/8 • 18 in x 1/4 (F) (M) NPT	1/card
62.543	I.D. 3/8 • 18 in x 1/4 (F) (M) NPT	1

Kit with coupler and plug	Quantity per package
62.560C 1/4 INDUSTRIAL • coupler 1/4 (F) • plug 1/4 (M) Hose I.D. 3/8 • 18 in	1/card
62.562C ULTRAFLO • coupler 1/4 (F) • plug 1/4 (M) Hose I.D. 3/8 • 18 in	1/card

ToolReg® 90 PSI PRESET REGULATOR



SAFETY



**MOUNTED DIRECTLY
ON THE AIR TOOL**



**90 PSI
at the tool**

- Economical solution to set ideal pressure at the tool, resulting in energy and cost savings and increases tool service life
- Vents residual pressure to prevent accidental tool activation after disconnection

		Quantity per package
62.220.06	1/4 (F-F) NPT • 25 SCFM	1
62.221.06C	1/4 (F-M) NPT • 25 SCFM	1/card
62.221.06	1/4 (F-M) NPT • 25 SCFM	1
62.224.06	3/8 (F-F) NPT • 77 SCFM	1
62.225.06	3/8 (F-M) NPT • 77 SCFM	1


SAVEAIR® PRESET ENERGY SAVING REGULATOR



SAFETY



COMPLIANT
RoHS




- Ensure optimal efficiency of air tool by providing a preset pressure
- Limit overconsumption of air, thus promoting energy savings
- Increase tools life
- Very reliable, safe and maintenance free

TECH TIP

The ideal air tool pressure is usually 90 PSI.
Each 15 PSI booster requires 6 to 10% more energy.

**IDEAL PRESSURE
AT THE APPLICATION**

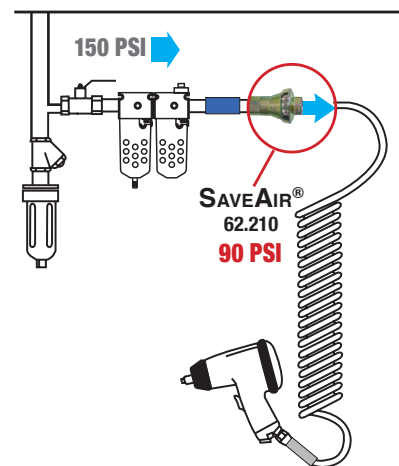

		Quantity per package
62.202	1/4 (F-F) NPT • 29 PSI	1
62.208	1/4 (F-F) NPT • 75 PSI	1
62.210C	1/4 (F-F) NPT • 90 PSI	1/card
62.210	1/4 (F-F) NPT • 90 PSI	1

OILS

PREMIUM MINERAL AIR TOOL OIL

- Detergent-free mineral formula
- Contains premium anti-wear additives, corrosion inhibitors and antioxidants additives



	Quantity per package	
69.050	500 ml	1
69.050.12	500 ml	12/case
69.101	1 L	1
69.101.12	1 L	12/case
69.104	4 L	1
69.104.04	4 L	4/case
69.100	18.9 L	1



NEW

Quantity per package

69.046
118 ml

EXTREME TEMPERATURES SYNTHETIC AIR TOOL OIL

- Detergent-free synthetic formula
- Very low pour point (-55 °C) and stable viscosity allow to lubricate and protect air tools exposed to extreme lower temperatures



	Quantity per package	
69.450	500 ml	1
69.450.12	500 ml	12/case



PREMIUM MINERAL OIL FOR RECIPROCATING COMPRESSOR

- Reduced energy costs by optimizing compressor efficiency
- Extends compressor service life
- Additives that extend lubricant service life and prevent viscosity breakdown



	Quantity per package	
69.201	1 L	1
69.204	4 L	1



AIR TOOL ANTI-FREEZE LUBRICANT

- Absorbs 4x its own weight in water
- Protects pneumatic equipment against corrosion
- Effective up to 245 PSI
- ISO Grade 22



	Quantity per package	
69.900	473 ml	1
69.904	3.78 L	1



NEW




TOOL BALANCERS

WHY USE A TOOL BALANCER?

Tool balancers are designed to improve efficiency and reduce fatigue in more demanding applications

Advantages to use a tool balancer:

- better tool stability increasing their precision
- a less crowded workplace
- reduces damage to tools

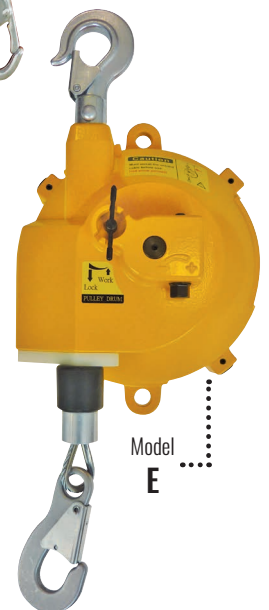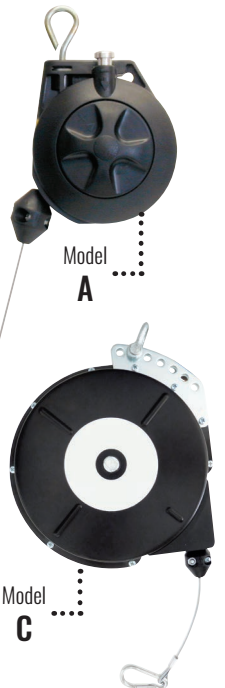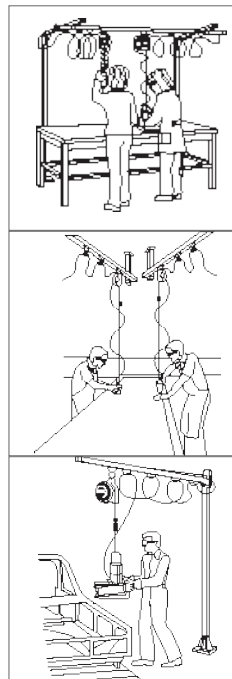

Model	Capacity kg Min-Max	Cable Diameter / Length
64.120 A	0.2 - 0.7	1.8 mm / 1.8 m
64.125 A	0.5 - 1.4	1.8 mm / 1.8 m
64.130 A	1.4 - 2.3	1.8 mm / 1.8 m
64.200 B	1.4 - 2.3	2.5 mm / 1.4 m
64.295 C	1.4 - 2.3	3 mm / 2.4 m
64.300 C	2.3 - 4.5	3 mm / 2.4 m
64.305 C	3.6 - 5.4	3 mm / 2.4 m
64.515 D	5 - 9	4 mm / 1.3 m
64.520 D	9 - 15	4 mm / 1.3 m
64.525 E	15 - 22	4.8 mm / 1.5 m
64.530 E	20 - 30	4.8 mm / 1.5 m

NEW

HOME GARAGE FLEXIBLE KIT

Easy to install and ready to use, a compressed air system in a box, perfect for any small spaces or home garage.



1/2" X 100'



**148
PSI**

**TEMP °C
- 40
+ 70**



05.900 Air Line Home Garage Kit

KIT INCLUDES:

Code	Description	Qty
35.150.27	Polyurethane tubing 1/2 x 100 ft	1
36.100	Tube cutter	1
44.180	Straight connector 1/2 x 3/8 (M) NPT	1
44.185	Straight connector 1/2 x 1/2 (M) NPT	2
44.215	Straight union 1/2	2
44.325	Union elbow 1/2	6
44.445	Tee union 1/2	1
05.305	Mounting clips for 1/2 tube	25
47.601	Aluminium Manifold 1/2 (F) NPT x 3/8 (F) NPT with drain	2
44.075	Miniature hand valve 3-way 1/2	1
20.962	Coupler (1/4 IND) 3/8 (M) NPT (manual)	2
60.322	Ergonomic blow gun 10 cm extension	1
20.242	Plug (1/4 IND) 1/4 (M) NPT	1
	Installation guide	1

Distributed by

TOPRING

Compressed air solutions since 1979

TOPRING.com

t 1 800 263-8677 • 450 375-1828

@ solutions@topring.ca

